


DPP 175

2 - COLOR GAUGE

- 1 - BE SURE THE TWO O-RINGS ARE IN PLACE ON THE BOTTOM OF THE GAUGE.
- 2 - SCREW IN THE HIGH PRESSURE BOLT TO FINGER TIGHT.
- 3 - SCREW IN THE LOW PRESSURE BOLT TO FINGER TIGHT.
- 4 - HAND TIGHTEN BOTH BOLTS EVENLY TO 20 IN - LBS. , OR USE A COIN.

REVERSE THIS PROCEDURE TO REMOVE GAUGE FROM FILTER

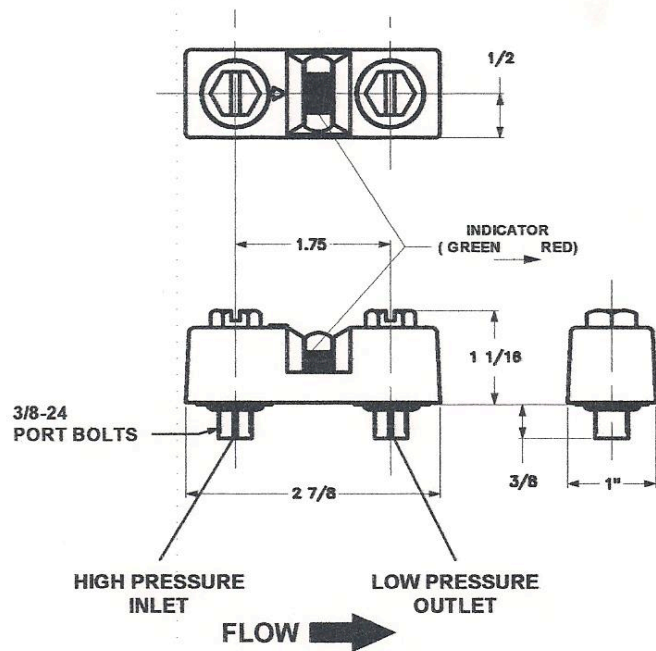

050802 1/01/14